

## Maintenance of ZCUT-2 TAPE DSPENSER

---






**1. TURN OFF THE SWITCH, take down the transparent cover**



Take down the screws of picture 1.then take down the cover.


## 2. take down the cover box

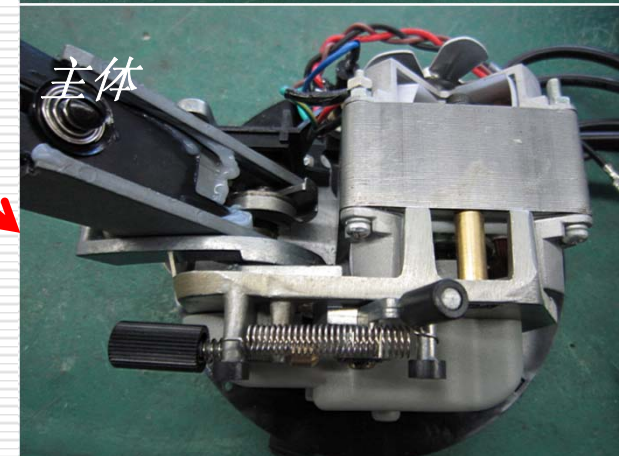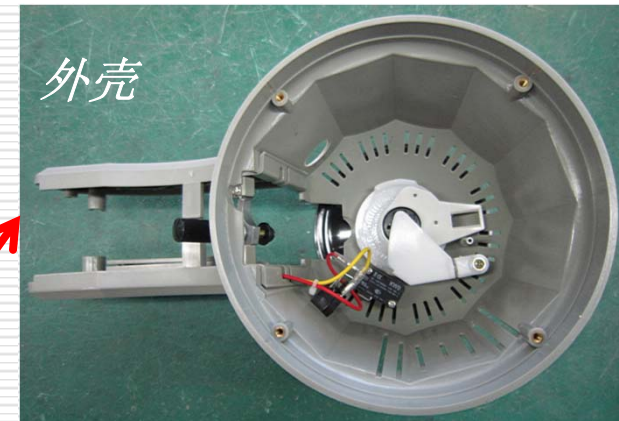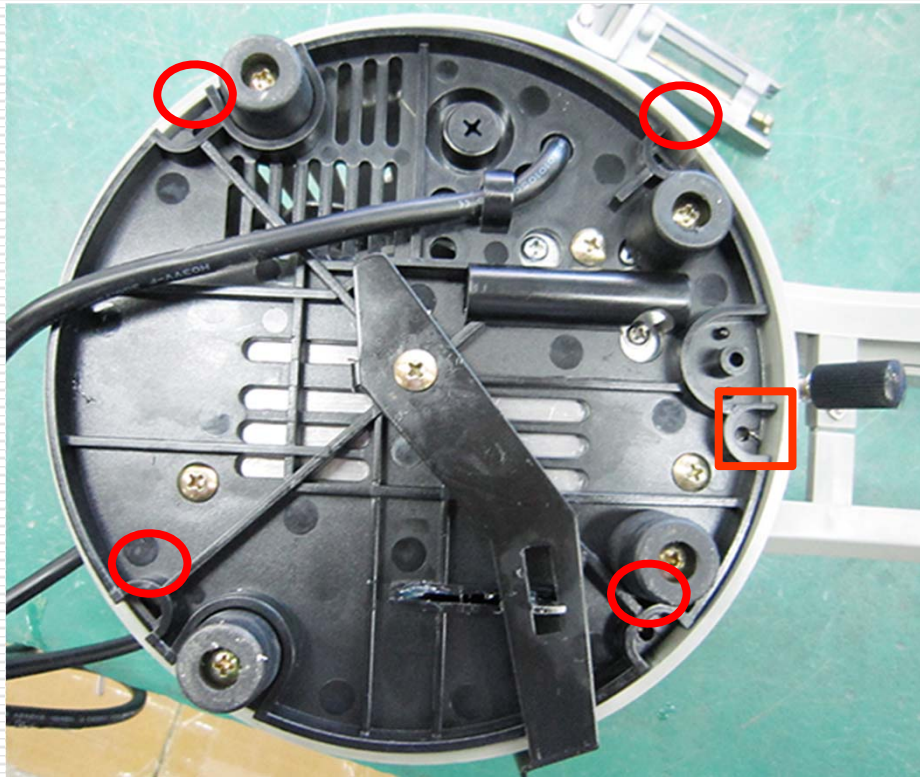

Turn over the machine and take down the screws as marked (picture 1). then take down the out cover box.

### 3. Take down the blades


---

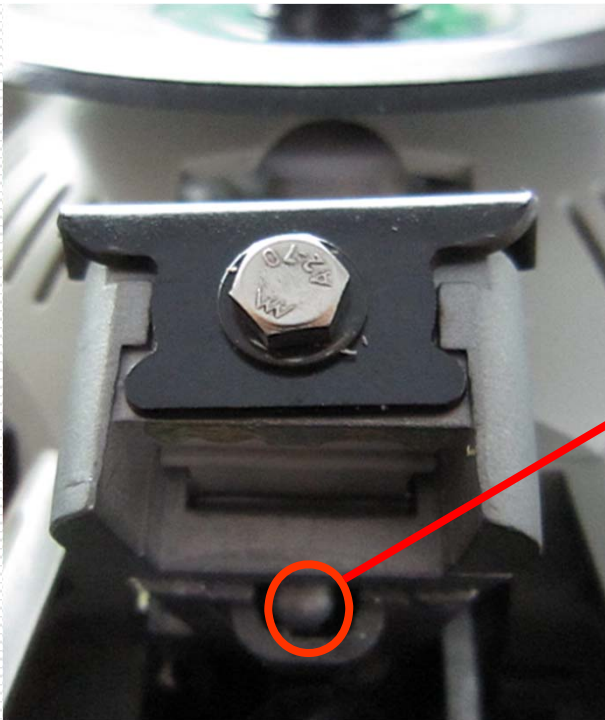

1



2

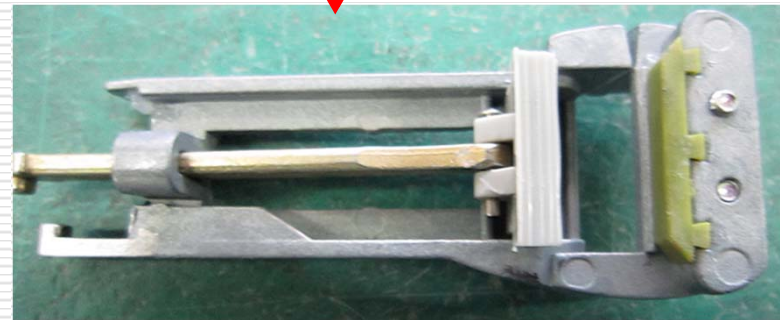

3


Loosen the spring and take down the scissors bonder.

---




#### 4. Take down the gears set cover

---

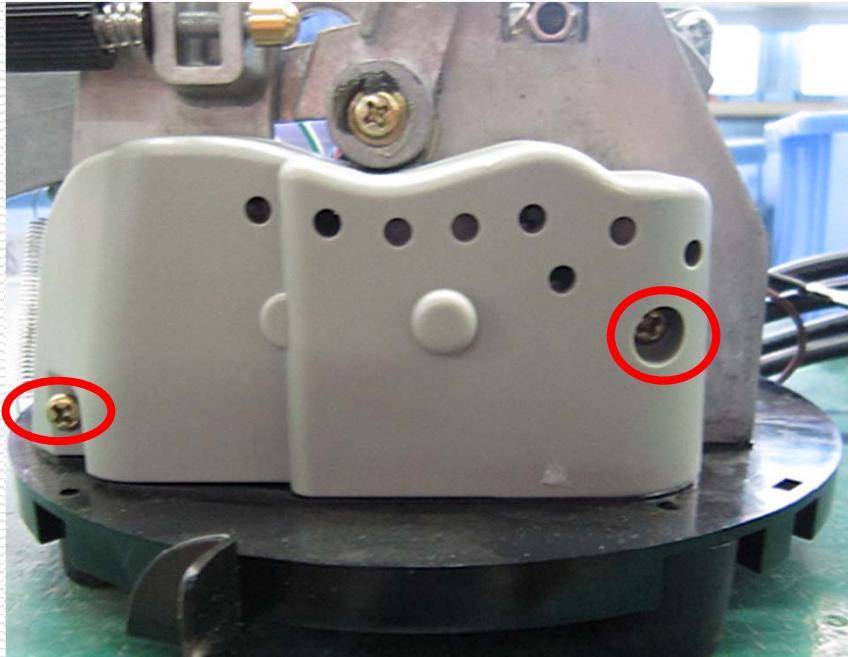

1

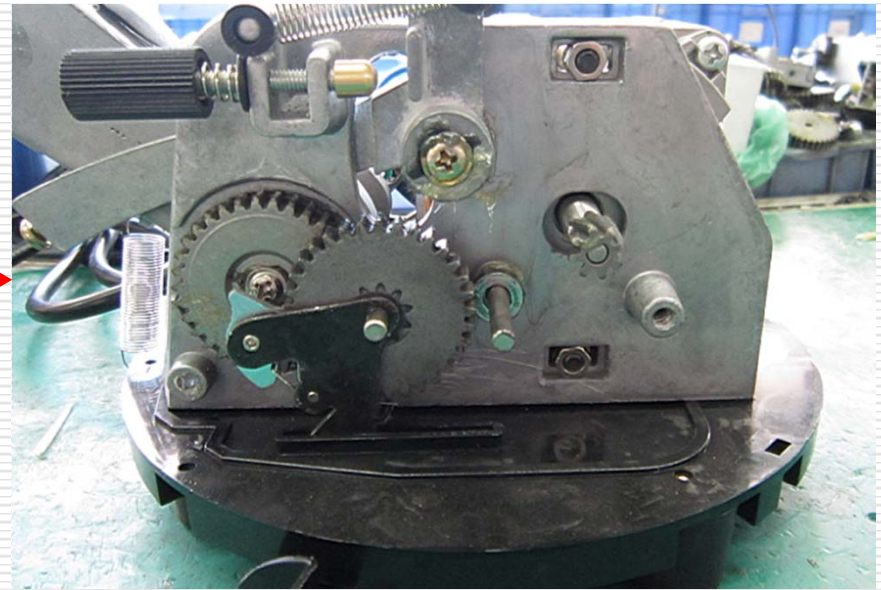

2

Take down the screws of marked parts (picture 1). Then Take down the gears set cover.

---

## ***CONTACT US***

---

**Allan He  
Sales Dept  
X.L.T. International Electronics Co.,Ltd  
Block 5, Foreign Trade Industrial Park, Guanlan Town,  
Baoan District, Shenzhen City, Guangdong Province, China  
Phone : 0086-15802783733  
Fax : 0086-755-2802 8685  
Skype :allenhe\_2008  
Facebook ID:Allan He  
QQ :823969434**

**NOTE: WE RESERVE ALL THE RIGHT FOR THE FINAL EXPLANTION.  
ANY QUTOS AND REVISE,PLS KINDLY INFORM US.**

---

---

THANK YOU

---